




Seohan-NTK Driveshaft USA CORP.

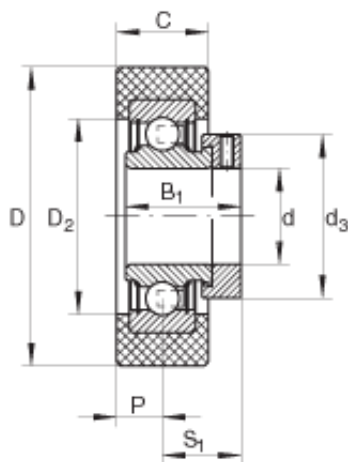

INA RCSMB20/65-FA106 Ball Insert Bearings

Bearing No. RCSMB20/65-FA106

RCSMB20/65-FA106 Bearing 2D drawings and 3D CAD models

Size	20x65.1x31 mm
Bore Diameter	20 mm
Outer Diameter	65,1 mm
Width	31 mm
d	20 mm
D	65,1 mm
B ₁	31 mm
C	25,4 mm
D ₂	40 mm
d _{3 max}	33 mm
P	12,7 mm
S ₁	23,5 mm
- / Temperature -20 ° C to +85 ° C	/ Temperature 20 ° C to +85 ° C
m	0,22 kg / Weight
	70 ° / Rubber ring: hardness, Shore A
C _g	1200 N / Rubber ring: load carrying capacity
C _r	13600 N / Dynamic load rating (radial)
C _{0r}	6600 N / Static load rating (radial)
- RAE20-NPP-FA106 / Designation bearing	RAE20NPPFA106 / Designation bearing
Category	Insert Bearings Cylindrical OD
Inventory	0.0



Seohan-NTK Driveshaft USA CORP.

Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
UNSPSC	31171536
Weight / Kilogram	0.22
Product Group	M06110
Inner Race Profile	Narrow Inner Ring
Outer Race Profile	Cylindrical
Mounting Method	Eccentric Collar
Rolling Element	Ball Bearing
Relubricatable	No
Seal Type	Double Lip Contact
Snap Ring	No
Inch - Metric	Metric
Long Description	20MM Bore; Narrow Inner Ring; 14MM Outer Race Width; 65MM Outside Diameter; Eccentric Collar; Ball Bearing; 31MM Length Thru Bore; Not Relubricatable; Double Lip Contact Seal; No Snap Ring
Other Features	Single Row With Set Screw With Inter Liner Corrotect Coating Metric
Length Thru Bore	1.22 Inch 31 Millimeter
Outer Race Width	0.551 Inch 14 Millimeter
Bore	0.787 Inch 20 Millimeter
Outside Diameter	2.559 Inch 65 Millimeter